

iBT-GPS Bluetooth GPS Data Logger

User's Manual



Published on 31-Jan-2008

8029602201B

Table of Contents

Chapter 1 Before you begin	4
1.1 Note and Warning	4
1.2 Introduction	5
1.3 Features	5
1.4 Applications	6
1.5 Appearance	7
1.6 Power & Log Button	8
1.7 LED Display	9
Chapter 2 Getting Started	10
2.1 Checking the package content	10
2.2 Getting Started	11
Step 1 Charging Your Battery	11
Step 2 Turning on the power / perform LOG	12
Step 3 Connecting your handheld device with iBT-GPS	13
Step 4 Loading your GPS mapping or routing software	16
Step 5 Starting the application	16
2.3 Helpful Tips	17
Chapter 3 Using Photo Tagger software	18
3.1 Execute and install software utility Photo Tagger	18
3.2 Google Earth	18
3.3 Software Utility --- iBT-GPS Photo Tagger	19
Appendix	20
Appendix A. Specifications	20
Appendix B. locr GPS Photo	23

Appendix C. How to install the hook and cord set.....	24
Appendix D. Anti Slip Pad	25
Appendix E. Certification	26
Appendix F. Warranty Information	28

Chapter 1 Before you begin

1.1 Note and Warning

- iBT-GPS uses Lithium battery. If iBT-GPS is used in temperature lower than -10°C or higher than 60°C , its battery charging capability will decrease. Please leave the iBT-GPS far from heat or high temperature environment. In addition, do not expose your iBT-GPS in temperature higher than $140^{\circ}\text{F}/60^{\circ}\text{C}$. If you do not follow these rules, the battery inside iBT-GPS may overheat, explode or burn itself, and this will lead to very serious damage. The Lithium battery inside the iBT-GPS should be recycled.
- While in the hospital, turning off the iBT-GPS is recommended. Wireless GPS receiver may interfere with medical equipments which use radio frequency.
- For a long period not using iBT-GPS, take out the battery and store it in dry/cool places.
- For safety, keep the iBT-GPS and all accessories out of children's reach.
- The manufacturer assumes no responsibility for any damages and loss resulting from the use of this manual, or from deletion of data as a result of malfunction, dead battery, or from misuse of the product in any way.
- Use only the supplied and approved accessories. Unauthorized accessories, modifications or attachments could damage the iBT-GPS, and may violate regulations governing radio devices.

- Use a dry, clean soft cloth to clean the unit. Do not use harsh cleaning solvents, chemicals, or strong detergents.
- Do not attempt to open the iBT-GPS yourself. Unauthorized hacking may damage the unit, and void your warranty.

1.2 Introduction

This iBT-GPS logger features an all-in-one, cost-effective portable GPS logging solution. With its on-board memory, it allows you to log your routes by ways of time/ distance/ speed. Through user friendly software utility, it shows your track on Google Earth. This data logger is small and robust, ideal to carry everywhere for applications such as route tracking, mountain climbing or fleet management.

1.3 Features


1. MTK GPS chipset **51** channels.
2. 18 hrs operation time.
3. Embedded with **32Mb** memory for saving up to 150,000 way points.
4. Dual modes for both route recording and navigation.
5. Smart power saving function for **18** hours operating continuously.
6. Smart auto sleep & wake up mode support 180hrs on standby.
7. Tracks can be shown on Google Earth.
8. WAAS and EGNOS supported for better accuracy.
9. Support NMEA-0183 GGA, GSA, GSV, RMC, VTG, GLL.
10. Fully compliant with Bluetooth V1.2

11. Support NMEA compliant mapping softwares like TomTom, Route66...etc.
12. 3 recording methods: by time, by speed, or by distance.

1.4 Applications

- Route recording
- Business trip expense management
- Fleet management
- Driving behavior monitoring
- Saving of Point of Interest

1.5 Appearance

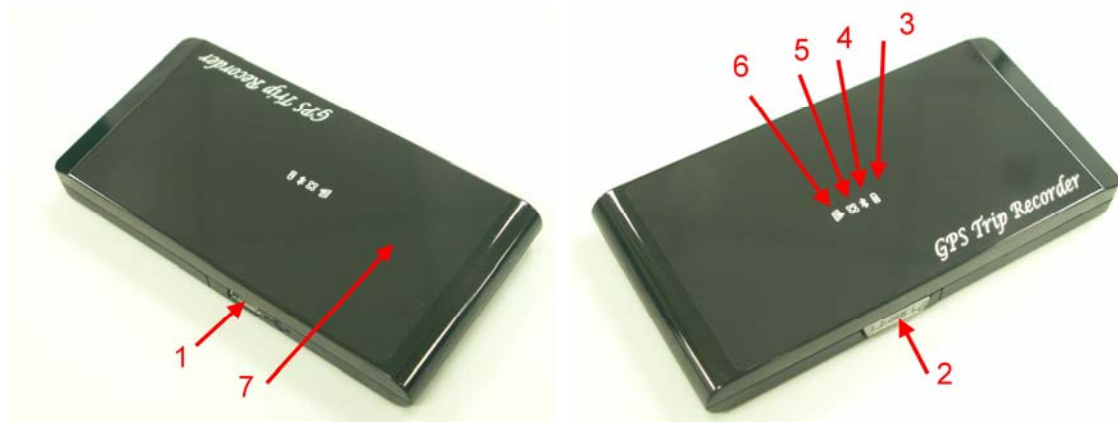

1. Power jack (mini USB type)
2. **Power & Log Button**
3. Battery status LED (red/green)
4. Bluetooth status LED (blue)
5. GPS status LED (orange)
6. Log status LED (blue)
7. Internal antenna

1.6 Power & Log Button





Power Switch	
Power On	To turn on the power, please click and hold for 3 second, then you can see the blue LED and orange LED turning on.
LOG Enable	To enable LOG mode, please click the Log Button, then you can see the blue Log status LED blinking. Enable log mode, navigation function is supported as well.
Log Disable	To disable LOG mode, please click the Log Button again, then you won't see the blue Log status LED blinking.
Power Off	To turn off the power, please click and hold for 3 seconds, then you can see the blue LED and red LED blinking 3 times.

Difference between LOG disable and LOG enable:

LOG disable	You can use the iBT-GPS as a Bluetooth GPS receiver to navigate when you have a Bluetooth enabled PDA/ Smartphone in your car. But the logging is off.
LOG enable	In this mode iBT-GPS works as a logger, navigation function is supported as well.

1.7 LED Display

The Bluetooth GPS data logger has 4 LED lights, one is Bluetooth Status LED, the 2nd one is Battery Status LED, the 3rd one is GPS Status LED, the 4th is is LOG Status LED/ Memory used LED:

Category	SYMBOL	COLOR	STATUS	Function
Bluetooth Status LED		Blue	Always on:	Bluetooth on, but not connected to any Bluetooth devices yet
			Slowly blinking:	Sleeping mode
			Quickly blinking:	Bluetooth is connected and ready for data transmission
Battery Status LED		Red	Blinking:	The battery is too low
		Green	Light On:	The battery is charging
		Green	Blinking:	The battery is fully charged
GPS Status LED		Orange	Always on:	Acquiring satellites, GPS position not fixed
			Quickly Blinking:	GPS position is fixed, Navigation
LOG Status LED		Blue	Slowly Blinking:	LOG enable
			Quickly Blinking:	The memory space is too low (20% left now)
			Solid	The memory is full and stop

Chapter 2 Getting Started

2.1 Checking the package content

Congratulations on your purchase of the iBT-GPS. Before you start using iBT-GPS, please make sure if your package includes the following items. If any item is damaged or missing, please contact your dealer at once.

- Bluetooth GPS Trip Recorder - iBT-GPS x 1
- USB to mini-USB cable x 1
- Traveler Power Adapter x 1 (optional)
- DC cigarette lighter adapter x 1
- Lithium rechargeable battery x 1
- CD Tool x 1 (user manual, software utility)
- User Manual x 1
- PU anti-slip pad x 1
- Hook and Cord Set x 1

*Unit package contents may vary depending on countries without prior notice.


*NOTE: The Cigarette Adapter can only be used to charge iBT-GPS. Please don't make use of it with devices other than iBT-GPS.

2.2 Getting Started

Please follow the procedure step by step.

Step 1 Charging Your Battery

To charge your iBT-GPS data logger, you have to plug your USB cable into the power source. Charging time is about 3~4 hours and you can charge from PC/ Notebook's USB HOST or from cigarette-lighter in car.

For the 1st time you use the iBT-GPS, please charge battery until it is full (the green LED blinks). The LED that represents the battery is the  icon (shown in below).



- If the LED is red, that means battery power is critically low. Charge immediately.
- If the LED is green, that means battery is charging now.
- If the green LED is blinking, that means battery is fully charged.

Step 2 Turning on the power / perform LOG



Power off (Before)



Power on (After)



Data record

Power Button	
Power On	To turn on the power, please click and hold for 3 second, then you can see the blue LED and orange LED turning on.
LOG Enable	To enable LOG mode, please click the Log Button, then you can see the blue Log status LED blinking. Enable log mode, navigation function is supported as well.
Log Disable	To disable LOG mode, please click the Log Button again, then you won't see the blue Log status LED blinking.
Power Off	To turn off the power, please click and hold for 3 seconds, then you can see the blue LED and red LED blinking 3 times.

Difference between LOG disable and LOG enable:

LOG disable	You can use the iBT-GPS as a Bluetooth GPS receiver to navigate when you have a Bluetooth enabled PDA/ Smartphone in your car. But the logging is off.
LOG	In this mode iBT-GPS works as a logger, navigation function is

enable	supported as well.
--------	--------------------

****For further function to download your routes to PC, please refer to user's manual: Photo Tagger software > Help > User Manual**


Step 3 Connecting your handheld device with iBT-GPS

Please refer to the user manual of PDA to enable the Bluetooth connectivity. If the connection between your device and iBT-GPS is successful, the blue LED of iBT-GPS will be blinking.

Below, we provide a common procedure of software installation to set up your PDA. (For other PDA, the steps may be different. Bluetooth Manager is a popular program used on Bluetooth device.)




-->

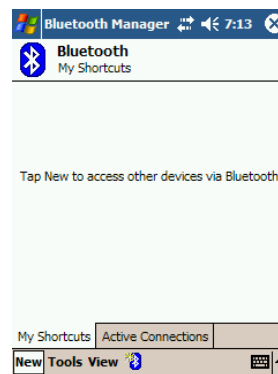

Start -> Bluetooth Manager


New

1. Open "Bluetooth Manager" on your pocket pc, and establish a new connection.

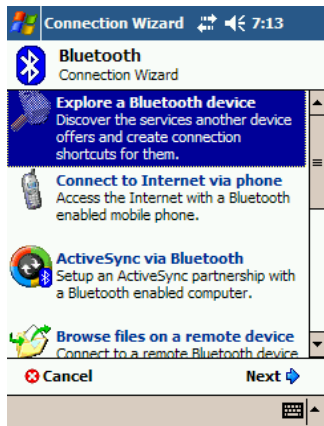

Explore A Bluetooth device

->Next

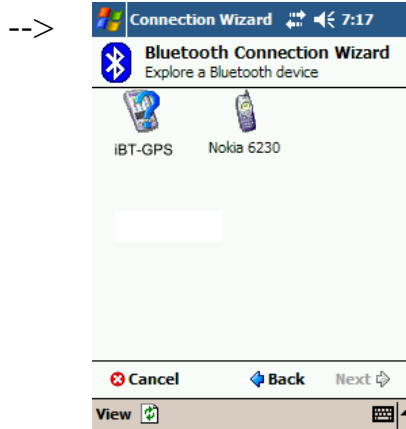

Tap iBT-GPS

2. Explore a Bluetooth device, and find the “iBT-GPS”




Passkey 0000 (if your PDA asks for the passkey)

3. (Optional)




-->

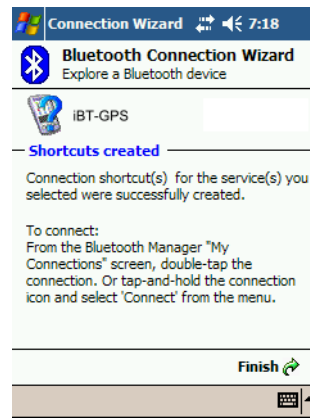


Select SPP slave->Next

4. Connect to Serial Port Profile (SPP) Slave

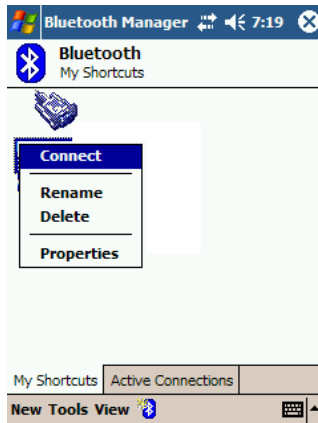

-->

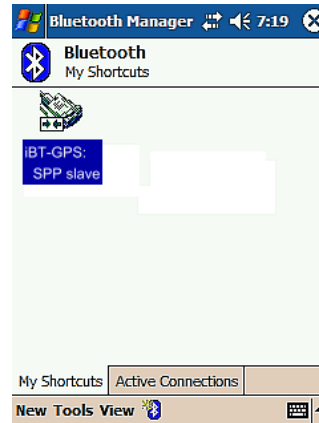

Tap and Hold iBT-GPS: SPP slave, Connect

5. Finish Bluetooth Manager Setup

Done

Step 4 Loading your GPS mapping or routing software

You should have mapping software on your PDA/ Smartphone/ laptop or you need to install it before using the iBT-GPS for navigation.

Step 5 Starting the application

Select the correct COM port & baud rate within the application

Note: The Bluetooth device in most of the applications has an “auto-detect” feature so that you do not need to select the Baud Rate.

2.3 Helpful Tips

- It's better to turn off the iBT-GPS when you don't use it, or the serial Flash's life can't last long.
- Some vehicles having heavy metallic sun protecting coating on windshields may affect GPS signal receptions
- Driving in and around high buildings may affect GPS signal receptions.
- Driving in tunnels or indoor park may affect signal receptions.
- In general, any GPS receiver performs best in open space where it can see clean sky. Also weather will affect GPS reception – rain & snow contribute to worse sensitivity.
- Low battery of a PDA or of an iBT-GPS may affect signal receptions.
- Please check the correct “COM” and “Baudrate” of your PDA.
- iBT-GPS output data updates every second, therefore the actual position and the position shown in your map may have slight time delay. This may happen when you drive at higher speed or make a turn around a corner.
- Note that iBT-GPS may not work indoors where it can not see the sky.
- For the 1st time you use the iBT-GPS, it will take 1 to 3 minutes to obtain the satellite constellation information and fix your position, this is called “Cold Start”. If you replace the battery, iBT-GPS will do Cold Start again.
- If your iBT-GPS can't fix your position for more than 20 minutes, we suggest you change to another spot with open space and then try again.

Chapter 3 Using Photo Tagger software

3.1 Execute and install software utility Photo Tagger

Complete GPS Photo Tagger and USB drivers installation (Refer to CD)

3.2 Google Earth

If your computer is not yet installed with Google Earth. Google Earth has a free download version, go download it on the internet first. For more information, please visit <http://earth.google.com/>.

3.3 Software Utility --- iBT-GPS Photo Tagger

For further function to use the Photo Tagger software in detail, please refer to Photo Tagger user manual:

Photo Tagger software > Help > User Manual

To use a mini-USB cable to connect the iBT-GPS to your PC, you have to power on the iBT-GPS unit. Please keep in mind to switch to LOG mode while using Photo Tagger software.

Appendix

Appendix A. Specifications

General	
Frequency	L1,1575.42MHZ
C/A Code	1.023MHZ
Datum	WGS84
Performance Characteristics	
Position Accuracy	Without aid: 3.0m 2D-RMS
	<3m CEP(50%) without SA(horizontal)
	DGPS (WAAS,EGNOS,MSAS):2.5m
Velocity Accuracy	Without aid: 0.1m/s
	DGPS (WAAS,EGNOS,MSAS):0.05m/s
Acceleration	Without aid:<4g
	DGPS (WAAS,EGNOS,MSAS):<4g
Timing Accuracy	50 ns RMS
Reacquisition Time	<1s
Hot start	1s
Warm start	33s
Cold start	36s
Sensitivity	Acquisition:-144dBm
	Tracking:-158dBm
Update	1Hz

Dynamic	
Altitude	Maximum 18,000m
Velocity	Maximum 515m/s
Acceleration	Maximum 4g
Power	
Input Voltage	Vin : 5.0V±5%
Work Hours	18hrs
Battery	Built-in rechargeable 750mAH Lithium battery
I/O	
Available Baud Rates	115200 bps
Protocols	NMEA 0183 v3.01
Environment	
Operating Temperature	-10 ~ 60C
Storage Temperature	-20 ~ 60C
Charging	0 ~ 45C
Bluetooth	
Standard	Fully compliant with Bluetooth V1.2
Output Power	0dBm (Typical),ClassII
Range	Up to 15 meters
Bluetooth Profile	Serial Port Profile(SPP)
Frequency	2.4G ~ 2.4835GHz ISM Band
Security	Yes


USB Bridge	
Standard	Fully compliant with USB2.0
Full - speed	12Mbps
Dimension	93.5 x 46 x 10.8mm

Data Log
32Mb serial Flash ROM
Up to 150,000 way points.
Log GPS data by time interval/ distance/ speed limit.
User can configure settings by using utility.

Appendix B. locr GPS Photo

With iBT-GPS data logger and locr GPS Photo software, users are allowed to import geotagging adds information to photos. The position (latitude/ longitude) then be written into the EXIF header for the further application. Also, locr GPS Photo can integrated travel log and digital photos by date/ time to show photos on the map directly.

Please find the installation file for Windows XP/ Vista in CD tool, or go to <http://www.locr.com> for further information.

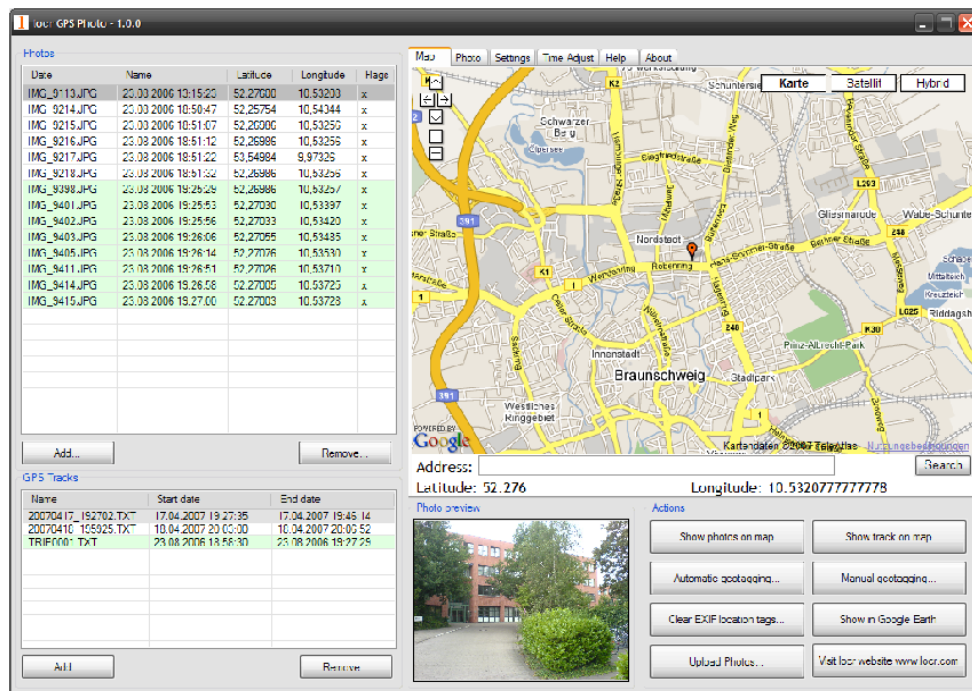

Appendix C. How to install the hook and cord set



Step 1 Hook and cord set



Step 4 Close the cover of battery



Step 2 Open the cover of battery



Step 5 Pierce through the hole



Step 3 Use chord to trap



Step 6 Done

Appendix D. Anti Slip Pad



- 1) The anti slip pad is made by PU GEL.
- 2) Without glue or any prior preparation, when you need to move just peel it off and without any track.
- 3) It is ideal for place on dashboard of car, truck, yacht... To keep all your goods not moving (such as: Cellular phone, glasses, radar sensor, coin, key and valuable goods... Etc.) When driving around curves, over speed bumps and sudden stop. Also suitable for office, home...
- 4) Avoids use on paper and wet object.
- 5) Multi-function, non-slipping, non-toxic and reusable. Please use clean water wash up and dry off it.

Appendix E. Certification

FCC Notices

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interface, and
2. This device must accept any interference received, including interference that may cause undesired operation.

FCC RF Exposure requirements:

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHOURIZED MODIFICATION TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

CE Notices

CE 0984 

Is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (89/336/EEC), Low-voltage Directive (73/23/EEC) and the Amendment Directive (93/68/EEC), the procedures given in European Council Directive 99/5/EC and 89/336/EEC.

The equipment was passed. The test was performed according to the following European standards:

- EN 300 328-2 V.1.2.1 (2001-08)
- EN 301 489-1 V.1.4.1 (2002-04) / EN 301 489-17 V.1.2.1 (2002-04)
- EN 50371: 2002
- EN 60950: 2000

Appendix F. Warranty Information

Thank you for your purchase of GPS product from the company.

The company warrants this product to be free from defects in materials and workmanship for one year from the date of purchase. The warranty for accessories is six months. The stamp of distributor or a copy of the original sales receipt is required as the proof of purchase for warranty repairs. The company will, as its sole option, repair or replace any components, which fail in normal use. Such repair or replacement will be made at no charge to the customer for parts or labor. The customer is, however, responsible for any transportation costs.

This warranty does not cover failures due to abuse, misuse, accident or unauthorized alteration of repairs. The company assumes no responsibility for special, incidental punitive or consequential damages, or loss of use.